




Note: Assembly is the same for all sizes of Graffiti displays

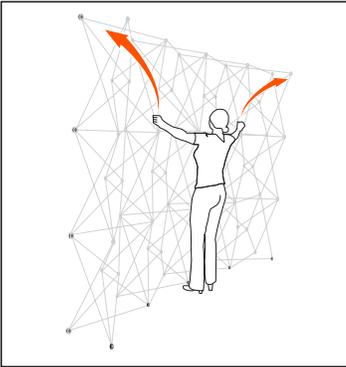


1. Expand the frames so they stand upright with the adjustable feet on the floor.

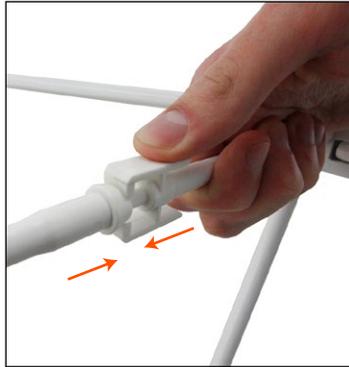


2. Push every connector together. Clips snap in place.

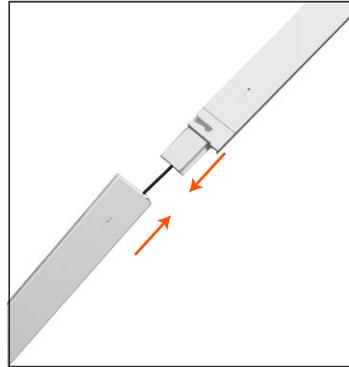

3. Assemble the channel bars. Slide the channel bar's end hook into the slot in the corner hub. See diagrams at the bottom of this page for channel bar locations.

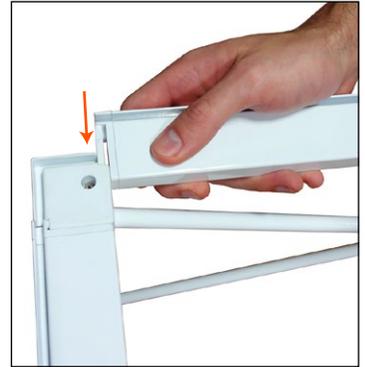

4. Snap the channel bars onto the silver nubs on the center hubs.

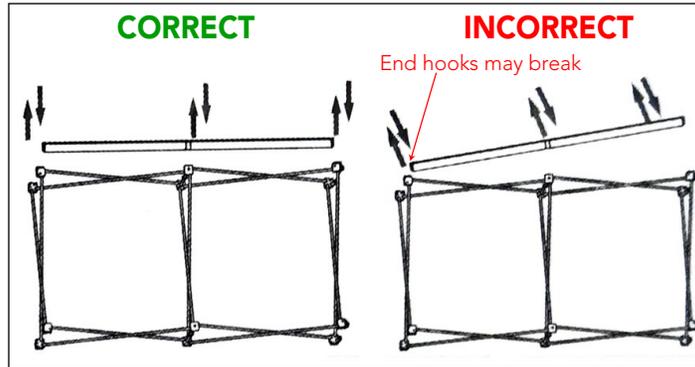


Warning: Handle channel bars with care. During installation or while dismantling, do not angle the channel bars. Angling channel bars applies stress to the end hook which may become damaged.



6. Snap four endcap channel bars to the top and bottom sides of the frame.

5. Slide the other end hook into the opposite corner hub.

This photo shows a common channel bar arrangement for a single-sided 20' Graffiti display. It utilizes two 10' frames with one graphic spanning both frames.


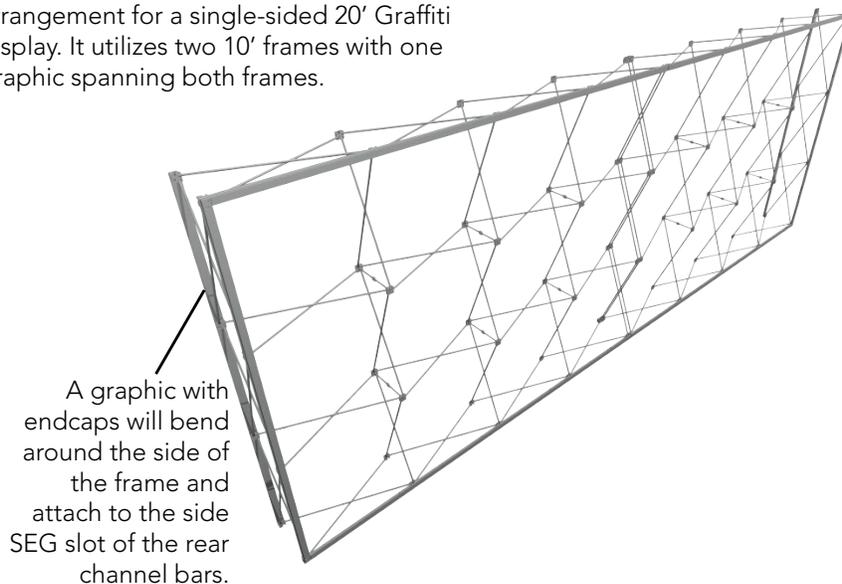


A graphic with endcaps will bend around the side of the frame and attach to the side SEG slot of the rear channel bars.

Need Help?
Scan the QR code or go to youtu.be/MoM8PsJrS8 to watch an assembly video



Graffiti Inline Snap Clips

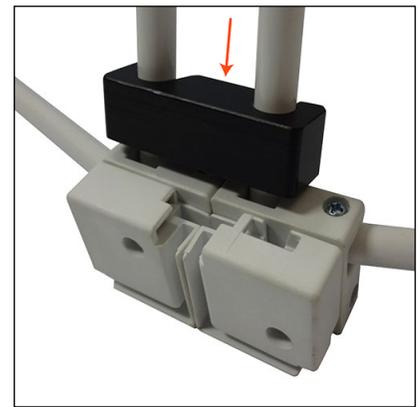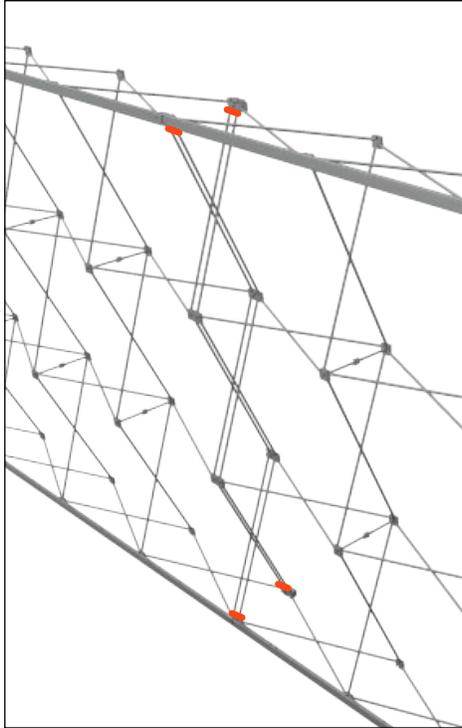

7A. Push frames together.
Snap clamps are recommended in the areas marked in orange above.

7B. Snap each clip onto the poles about 6-7" away from the hubs.

7C. Slide the clips toward the hubs to tighten.



8. Install the graphic.
See following page for detailed graphic installation guidelines



9. Install optional lights. The light clips attach over the top, horizontal channel bars. The lights slide onto the light clips.

Graphic Installation Instructions



Caution! Installing silicone-edged graphics is technique sensitive; Practice will shorten installation time.



Handle graphics with care with clean hands in a clean environment. Clean cloth or latex gloves are recommended.

Graphic installation may be easier with the frame laying on the ground.



How to Install SEG Graphics:

Turn and tuck the side of the graphic with the silicone welt into the SEG groove. The stitched edge goes into the groove first.



Pulling on the silicone welt during installation stretches the silicone and creates a bulge in the silicone welt that is difficult to correct smoothly.


A series of tucks reduces excess silicone.

Installing Graphics with Endcaps

1. Start tucking the graphic in one corner. If your graphic has endcaps, start tucking where the silicone welt begins.

2. Tuck the graphic in several places across the top channel bar. Note: The silicone will be notched at the seam between frames. Locate the notches and make sure they are aligned with the seams.

4. Complete top and bottom installation.

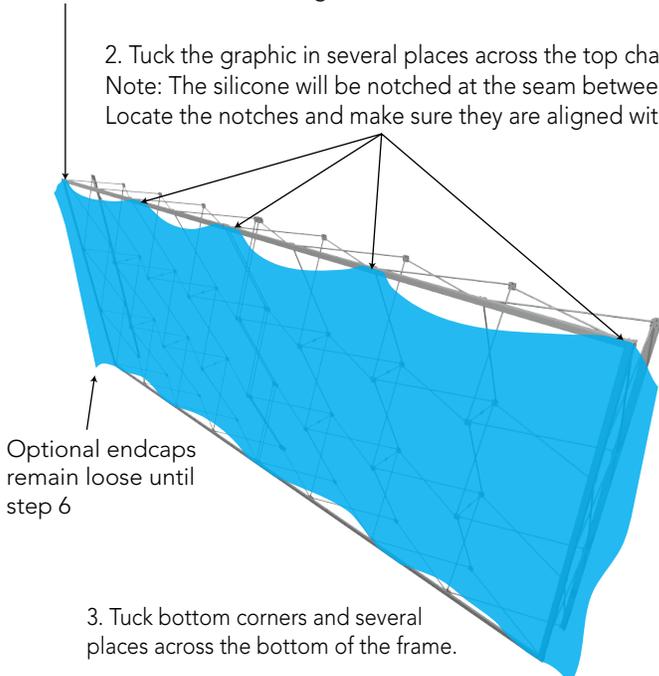

3. Tuck bottom corners and several places across the bottom of the frame.

5. Wrap endcaps around the frame and tuck into the side channels of the rear channel bars and the horizontal channels of the endcap channel bars.