



SEG Graphics have silicone sewn to the edge of the fabric.

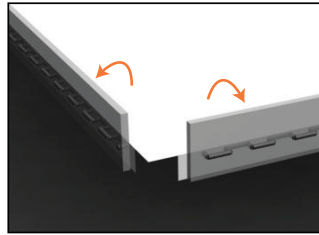


The silicone strips are rotated before being tucked into the channel.

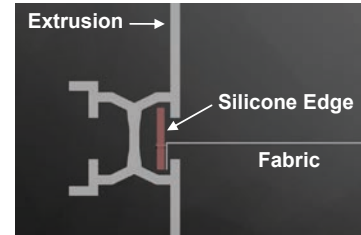


Cross section of extrusion channel with graphic installed


How to Install SEG Graphics

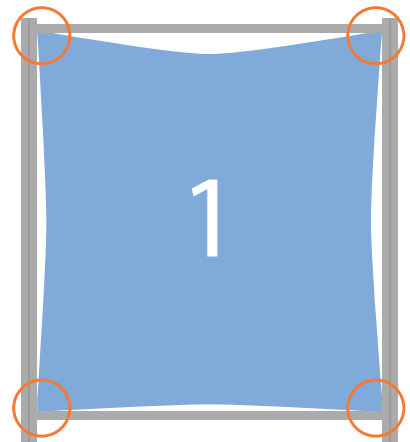

1. Starting in one corner of the display, tuck silicone edge of graphic into channel. Repeat for the other three corners.

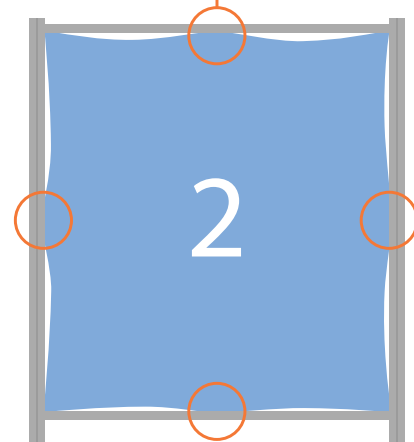

2. Tuck silicone into the center of all four sides.

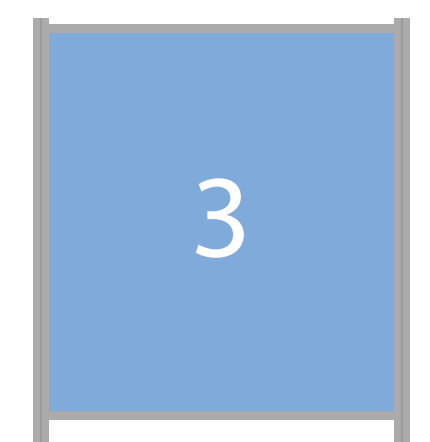

3. Work your way across top of graphic tucking silicone edge into channel. Repeat for the sides and bottom.

Tip: Use a window spline roller tool to ease installation.



Note: Bottom bar may be adjusted up or down to adjust tension of graphic.