



1. Expand the frames so they stand upright with the adjustable feet on the floor.

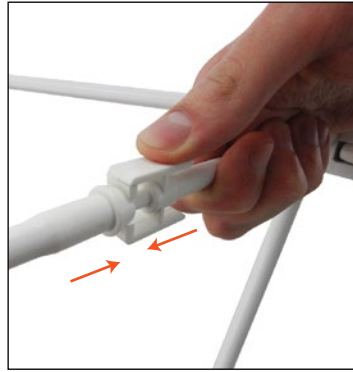

2. Push every connector together. Clips snap in place.

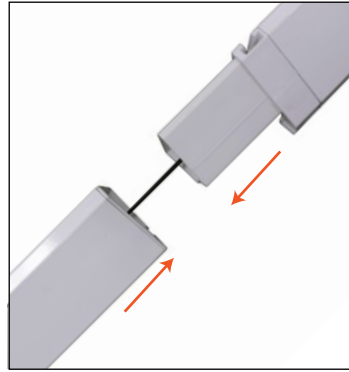


3. Assemble the channel bars. Slide the channel bar's end hook into the slot in the corner hub.


Note: The angled channel bars will be used for the front printed graphic, while the flat channel bars will be for the light blocking backers.



4. Snap the channel bars onto the silver nubs on the center hubs.

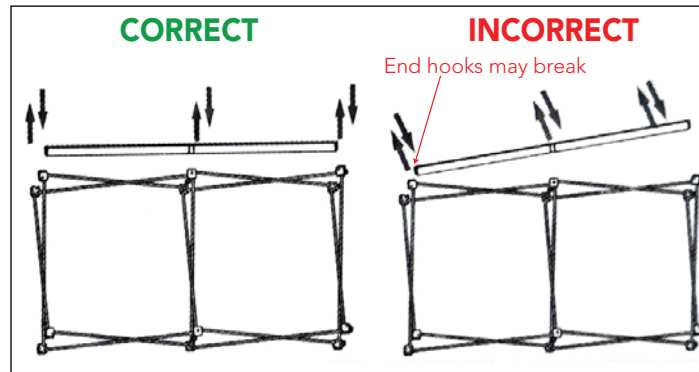


Warning: Handle channel bars with care. During installation or while dismantling, do not angle the channel bars. Angling channel bars applies stress to the end hook which may become damaged.

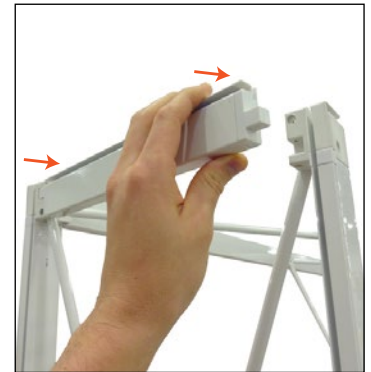


6. Snap four endcap channel bars to the top and bottom sides of the frame.

5. Slide the other end hook into the opposite corner hub.

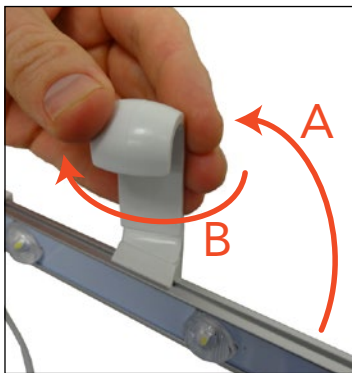


7. Rotate the four hooks out on each curtain light (Arrow A).
Twist each hook so that it faces forward (Arrow B).

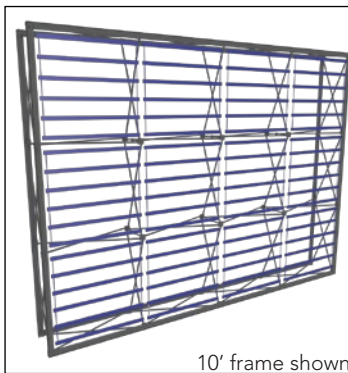

8. Install the lights as seen on page 2.





9. Install the graphics and endcaps. See Page 3 for detailed graphic installation guidelines.

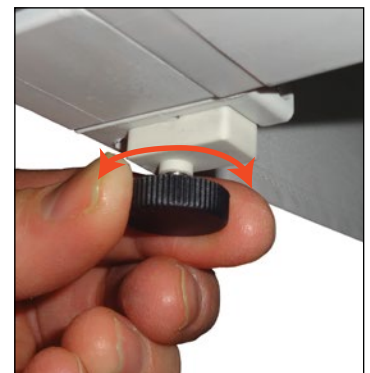


10. If the frame is on uneven ground or if it leans forwards or backwards, adjust the feet on the bottom of the frame.

Light Installation Instructions

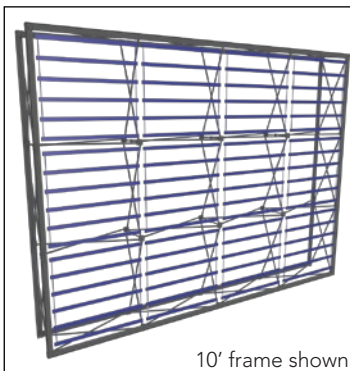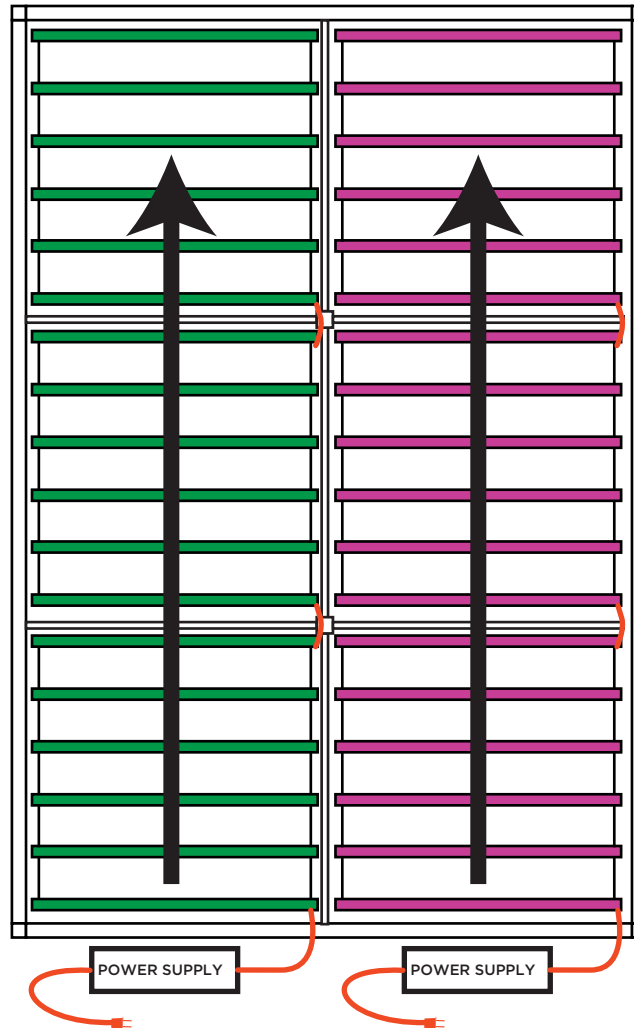

1. Install the lights. Each curtain fits inside a single "quad" that is mounted in the frame closest to the graphic channel bars.

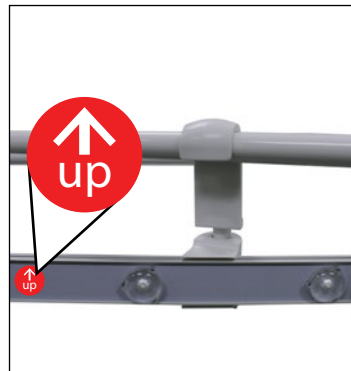

2. With the "up" sticker facing toward the top of the frame, mount the clips to the frame so the hooks are facing outward. Stretch the bottom hooks down and hook them onto the frame.



3. Ensuring the cables are inside the frame, connect each column of curtain lights in-line together as depicted in the diagram above.



4. Connect each power supply to the curtain lights as depicted in the diagram above. Each column of lights requires one power supply.
Tip: Before installing graphics, plug in the power supplies to test the lights.

Graphic Installation Instructions



Caution! Installing silicone-edged graphics is technique sensitive; Practice will shorten installation time.



Handle graphics with care with clean hands in a clean environment. Clean cloth or latex gloves are recommended.

Graphic installation may be easier with the frame laying on the ground.



How to Install SEG Graphics:

Turn and tuck the side of the graphic with the silicone welt into the SEG groove. The stitched edge goes into the groove first.



Pulling on the silicone welt during installation stretches the silicone and creates a bulge in the silicone welt that is difficult to correct smoothly.

A series of tucks reduces excess silicone.

Installing Graphics

1. Start tucking the graphic in one corner.

2. Tuck the graphic in the middle and then the opposite top corner.

3. Tuck the bottom corners and the middle of the bottom front.

4. Complete installation on all four edges.

5. Install separate endcap panels to the sides. Tuck all four sides into the channels.